

## TEMPOMATIC 4 waterproof housing for showers

Ref. 443SBOX

Mains supply, kit 1/2


### DESCRIPTION


TEMPOMATIC 4 waterproof housing for showers - [Ref. 443SBOX](#)

TEMPOMATIC 4 waterproof housing for showers kit 1/2:  
 Collar with waterproof seal.  
 Hydraulic connection to the outside and maintenance from the front.  
 Adjusts to all types of installation (rails, solid walls, panels).  
 Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 93mm).  
 Integrated stopcocks, flow regulator, filter, non-return valve and cartridge, accessible from the front.  
 Supplied in 2 kits: to allow secure system flush without sensitive elements.  
 30-year warranty.  
 Order with control plate only, reference 443228 or complete shower kit, reference 443229.

### TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 waterproof housing for showers - [Ref. 443SBOX](#)

Connector	1/2"
Technology	Electronic
Depth	10 - 120mm
Width	170mm
Norms	ACS
Warranty	

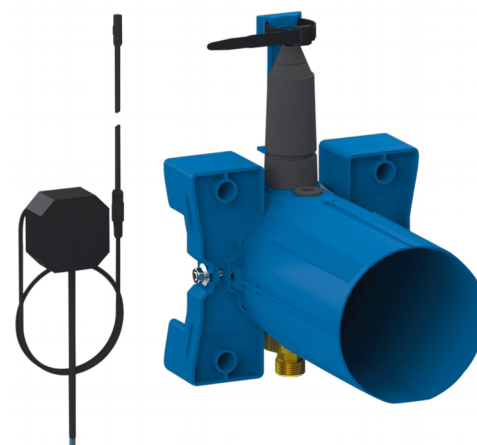

### ADVANTAGES



For recessed installation



Adjustable and modular waterproof housing



System tested to over 500,000 operations



100% waterproof housing

