

# Shower kit with thermostatic mixer

Ref. H9769KIT

Shower kit with thermostatic mixer with no non-return valves

2024 UK public price excluding VAT: £492.72

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9769KIT

Shower riser rail with thermostatic dual control mixer.  
Shower kit with SECURITHERM thermostatic shower mixer.  
Thermostatic mixer with no non-return valves on the inlets (reduces bacterial proliferation).  
No risk of cross flow between hot and cold water.  
Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.  
Prevents cold showers: shuts off automatically if hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant thermostatic cartridge adjusts the temperature.  
1/4-turn ceramic valve head adjusts the flow rate.  
Temperature control up to 43°C.  
Double temperature limiter: 1st limiter set at 41°C can be overridden, 2nd limiter set at 43°C.  
Thermal shocks are possible without removing the control knob or shutting off the cold water.  
Flow rate limited at 9 lpm at 3 bar.  
Chrome-plated brass body and ergonomic control knobs.  
M1/2" bottom outlet.  
Filters integrated in the inlets, F3/4".  
Mixer with offset STOP/CHECK wall connectors, M1/2" M3/4".  
• Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).  
• Shower head retaining collar (ref. 828).  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Mixer suitable for people with reduced mobility.  
Shower kit with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9769KIT

Connector	M1/2"
Technology	SECURITHERM Securitouch thermostatic mixer, no non-return valves
Depth	95mm
Length	260mm
Flow rate	9 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass



## ADVANTAGES



SECURITHERM: Anti-scalding safety




Securitouch thermal insulation prevents burns.



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

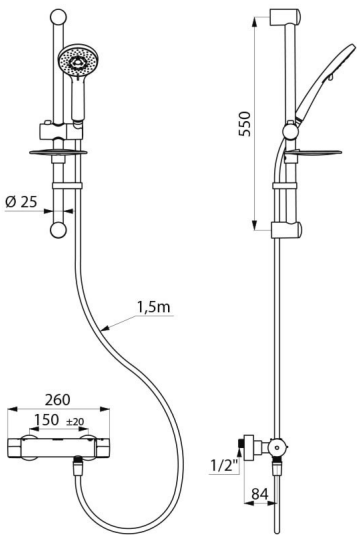

Norms	ACS 
Warranty	