

# SECURITHERM thermostatic basin mixer

Ref. H9600

Single hole sequential thermostatic mixer H.95mm L.120mm





## DESCRIPTION

**SECURITHERM thermostatic basin mixer - Ref. H9600**

Deck-mounted SECURITHERM thermostatic basin mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
No risk of cross flow between hot and cold water.  
Mixer has no non-return valves on the inlets.  
Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener.  
Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.  
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
Thermal or chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate limited to 5 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with F3/8" PEX flexibles with chrome-plated brass stopcocks.  
Fixing reinforced via 2 stainless steel rods.  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Mixer suitable for people with reduced mobility.  
Mixer with 30-year warranty.  
Also available with copper tails.





## TECHNICAL CHARACTERISTICS


**SECURITHERM thermostatic basin mixer - Ref. H9600**

Connector	F3/8"
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	   



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

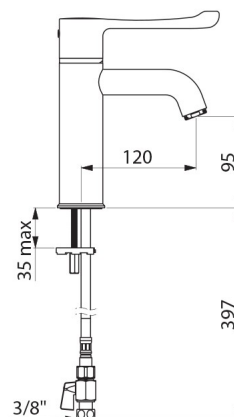

Warranty



Repairability

