

# Thermostatic SECURITHERM securitouch auto-drain shower kit.

Ref. H9741KIT

Thermostatic shower kit with H971 mixer

## DESCRIPTION

Thermostatic SECURITHERM securitouch auto-drain shower kit. - Ref. **H9741KIT**

Riser rail with dual control thermostatic mixer.  
 Shower kit with SECURITHERM thermostatic shower mixer.  
 Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.  
 Prevents cold showers: shuts off automatically if hot water supply fails.  
 Securitouch thermal insulation prevents burns.  
 Scale-resistant thermostatic cartridge adjusts the temperature.  
 ¼-turn ceramic head for flow rate adjustment.  
 Temperature control from 25 - 41°C.  
 Double temperature limiter: 1st limiter set at 38°C can be overridden, 2nd limiter set at 41°C.  
 Thermal shocks are possible without removing the control knob or shutting off the cold water supply.  
 Flow rate regulated at 9 lpm.  
 Chrome-plated brass body with ERGO control knobs.  
 M1/2" shower outlet.  
 F3/4" inlets with integrated filters and non-return valves.  
 Mixer with 2 offset STOP/CHECK wall connectors, M1/2" M3/4".  
 • Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).  
 • Shower hose retaining collar (ref. 830).  
 Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Thermostatic mixer suitable for people with reduced mobility.  
 Shower kit with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Thermostatic SECURITHERM securitouch auto-drain shower kit. - Ref. **H9741KIT**

|                     |                                            |
|---------------------|--------------------------------------------|
| Connector           | M1/2"                                      |
| Technology          | SECURITHERM Securitouch thermostatic mixer |
| Depth               | 92mm                                       |
| Length              | 286mm                                      |
| Flow rate           | 9 lpm                                      |
| Temperature limiter | Yes                                        |
| Finish              | Chrome-plated brass                        |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Double maximum temperature limiter



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

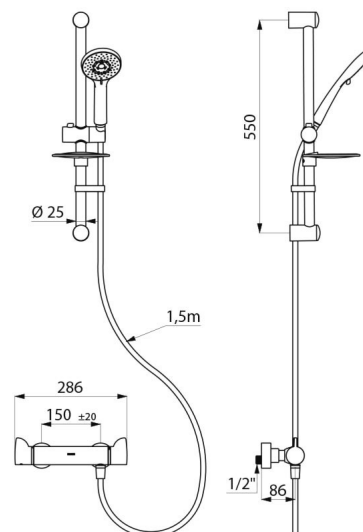

|               |                                                                                                                                                                     |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Norms         |   |
| Warranty      |                                                                                    |
| Repairability |                                                                                    |