

Aluminium shower panel with SECURITHERM sequential mixer

Ref. H9639

Sequential thermostatic mixer

DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9639

Anodised aluminium shower panel for wall-mounted exposed installation: SECURITHERM sequential thermostatic mixer (non-time flow).

Adjustable temperature control from cold water up to 39°C; maximum temperature limiter set at 39°C, can be adjusted.

Anti-scalding failsafe: automatic shut-off if cold water supply fails.

Anti-cold showers function: automatic shut-off if hot water fails.

Thermal shocks are possible.

Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.

Comfortable, rain-effect spray.

Hygiene control lever L. 100mm.

Top inlets with inline M1/2" stopcocks.

Concealed fixings.

Filters.

Suitable for people with reduced mobility.

30-year warranty.

TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9639

Supply	Top inlets with M1/2" inline stopcocks
Connector	M1/2"
Technology	Sequential thermostatic SECURITHERM
Height	1050mm
Width	210mm
Flow rate	6 lpm
Temperature limiter	39°C
Finish	Aluminium
Norms	  
Warranty	



ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




No non-return valves on inlets



Thermostatic: total temperature stability



Sequential open and closing on cold water

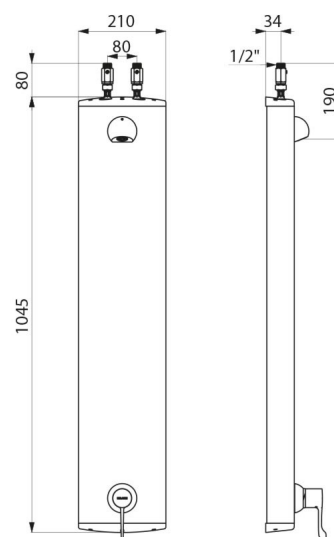

Repairability

