TEMPOFLUX 2 direct flush valve

Ref. 762150

Direct flush WC valve

DESCRIPTION

TEMPOFLUX 2 direct flush valve - Ref. 762150

Flush system without cistern: directly connected to pipework.
For walls ≤ 140mm.
3L/6L dual flush can be adjusted to 2L/4L.
Soft-touch operation.
Vacuum breaker.
Integrated stopcock and flow rate / flush volume adjuster.
Solid brass body.
Chrome-plated metal push-button.
In-line inlet M¾".
Outlet connection for PVC tube Ø 26/32mm.
Threaded rod can be cut to size.
Acoustic level complies with European standard EN 12541 class II.
Upstream supply pipes: minimum Ø 20mm required at all points (including connectors).
Base flow rate: 1 L/sec at 1 bar dynamic pressure.
Compatible with rain water.
Suitable for rimless WC pans without flow rate regulation.
Suitable for people with reduced mobility.
30-year warranty.

ADVANTAGES

- Soft-touch operation
- Dual flush 3L/6L
- No cistern: no stagnant water
- Cross wall installation

TECHNICAL CHARACTERISTICS

TEMPOFLUX 2 direct flush valve - Ref. 762150
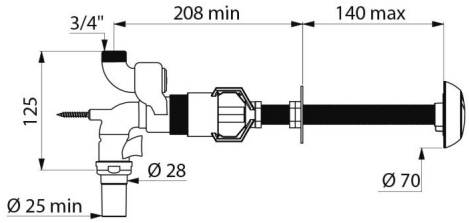
Connector	¾"
Technology	Time flow
Length	140mm
Flow rate	3L/6L
Norms	
Warranty	30 YEAR WARRANTY