


TEMPOFLUX 1 direct flush valve

Ref. 761627

Time flow direct flush WC valve



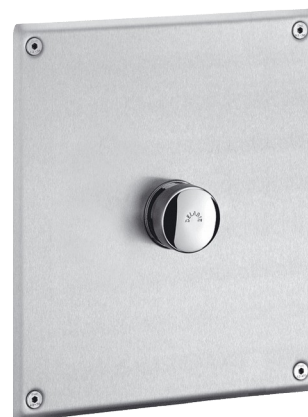


DESCRIPTION

TEMPOFLUX 1 direct flush valve - Ref. 761627

Recessed time flow valve for direct flush:
Stainless steel control plate 220 x 170mm.
Multipurpose recessing housing.
Soft-touch operation.
Time flow ~7 seconds.
Vacuum breaker.
Integrated stopcock and flow/volume rate adjuster.
Solid brass body and chrome-plated push-button.
In-line inlet M $\frac{3}{4}$ ".
Outlet connection for PVC tube \varnothing 26/32mm.
Upstream supply pipes: minimum \varnothing 20mm required at all points (including connectors).
Base flow rate: 1 L/sec at 1 bar dynamic pressure.
Compatible with rain water.
Suitable for people with reduced mobility.
30-year warranty.
This model does not have a waterproof recessing housing. The installer must ensure that the recessing area is waterproof and any leaks or condensation can drain away (see installation guide).

TECHNICAL CHARACTERISTICS

TEMPOFLUX 1 direct flush valve - Ref. 761627

Connector	3/4"
Height	220mm
Width	170mm
Norms	 
Warranty	

ADVANTAGES



No cistern: no stagnant water



Wall recessed installation



Powerful flush and immediately available



Direct flush reduces the risk of leaks

