

# SECURITHERM shower panel

Ref. 792514

Electronic mains supply thermostatic

## DESCRIPTION

**SECURITHERM shower panel** - Ref. 792514

Electronic thermostatic shower panel:  
 Large stainless steel panel for wall-mounted, exposed installation.  
 Concealed inlet via flexibles M $\frac{1}{2}$ ".  
 SECURITHERM thermostatic mixer.  
 Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.  
 Anti-scalding failsafe: automatic shut-off if cold water fails.  
 Anti-cold showers function: automatic shut-off if hot water fails.  
 Thermal shocks are possible.  
 Mains supply 230/6V.  
 Shower starts when electronic push-button is pressed.  
 Shuts off voluntarily or automatically after ~60 seconds.  
 Duty flush (~60 seconds every 24 hours after the last use).  
 Flow rate 6 lpm at 3 bar, can be adjusted, rain-effect spray.  
 Chrome-plated, tamperproof ROUND shower head.  
 Integrated soap dish.  
 Filters and non-return valves.  
 Stopcocks M $\frac{1}{2}$ ".  
 Concealed fixings.  
 Suitable for people with reduced mobility.  
 30-year warranty.

## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel** - Ref. 792514

|                     |                     |
|---------------------|---------------------|
| Supply              | 230/6V mains supply |
| Connector           | M $\frac{1}{2}$ "   |
| Technology          | Electronic          |
| Height              | 1220mm              |
| Depth               | 100mm               |
| Width               | 250mm               |
| Flow rate           | 6 lpm               |
| Temperature limiter | Thermostatic        |
| Finish              | Stainless steel     |

Norms

**ACS**



## ADVANTAGES



Exceptional water savings: 80%




Anti-bacterial proliferation duty flush



Thermostatic temperature regulation



Instant shut-off if cold water fails

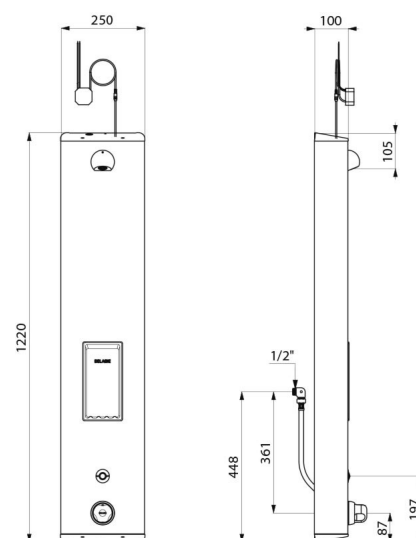

Warranty

