

TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout

Ref. 20870T3

Single hole infrared tall mixer with stainless steel swivelling spout

DESCRIPTION

TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout - Ref. 20870T3

Deck-mounted electronic basin mixer.
Electronic mixer with high, removable, swivelling BIOCLIP spout H. 300mm.
Single hole mixer supplied with 2 removable stainless steel spouts L.185mm Ø 28mm.
Independent IP65 electronic control unit.
Mains supply via 230/12V transformer.
Body and spout with smooth interiors (reduces niches where bacteria can develop).
Adjustable duty flush (preset to approx. 60 seconds every 24 hours after last use) to prevent water stagnation in the network in the event of prolonged periods of non-use.
Flow rate limited to 9 lpm at 3 bar.
Shockproof infrared presence detection sensor.
Chrome-plated brass body with reinforced fixing via 2 stainless steel rods.
Hygiene lever L. 100mm controls temperature.
Pex flexibles with filters and M3/8" solenoid valves.
Anti-blocking safety.
Solenoid valves are upstream of the mixing chamber.
Electronic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
30-year warranty.
Two shut-off options:
- standard mode: timed flow with automatic shut-off.
- ON/OFF mode: user shuts off flow voluntarily after 30 minutes.
Thermal shocks are possible.
Position the sensor to the side of the mixer in the ON/OFF mode.

TECHNICAL CHARACTERISTICS

TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout - Ref. 20870T3

Supply	Mains supply 230/12V
Connector	M3/8"
Technology	Electronic mixer
Height	420mm
Drop height	300mm
Spout length	185mm
Flow rate	9 lpm at 3 bar



ADVANTAGES



Automatic duty flush limits bacterial development




Hygiene: removable spout for internal cleaning





Hygiene: smooth interior reduces bacteria

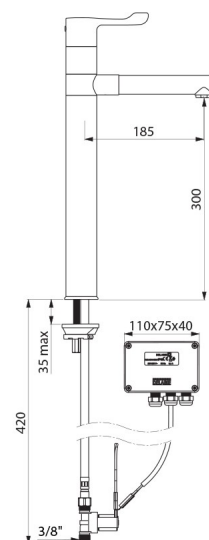

Water saving: split delivery



Finish	Chrome-plated brass
Norms	ACS CE 
Warranty	
Repairability	