

# SECURITHERM BIOCLIP

## thermostatic sink mixer

Ref. H9614P

Wall-mounted sequential thermostatic mixer



### DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9614P

Wall-mounted SECURITHERM thermostatic sink mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
No risk of cross flow between hot and cold water.  
No non-return valves on the inlets.  
Wall-mounted mixer supplied with 2 removable chrome-plated brass spouts L. 126mm.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant sequential thermostatic cartridge for sequential control of flow rate and temperature.  
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
Tested without water to meet NHS requirements. No preset temperature.  
Thermal or chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate regulated at 7 lpm.  
Chrome-plated brass body.  
No manual contact thanks to Hygiene control lever L. 146mm.  
Mixer with 200mm centres, supplied with 2 in-line STOP/CHECK M1/2" M3/4" connectors ideal for hospitals.  
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Suitable for people with reduced mobility.  
Mixer with 30-year warranty.

### TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9614P

|                     |                                      |
|---------------------|--------------------------------------|
| Connector           | M1/2"                                |
| Technology          | SECURITHERM BIOCLIP sequential mixer |
| Height              | 141mm                                |
| Width               | 234mm                                |
| Spout length        | 126mm                                |
| Flow rate           | 7 lpm                                |
| Temperature limiter | Yes                                  |
| Finish              | Chrome-plated brass                  |

### ADVANTAGES



Sequential: opens/closes with cold water





Maximum hygiene: no non-return valves



Removable spout: reduces bacterial development



SECURITHERM: optimum anti-scalding safety

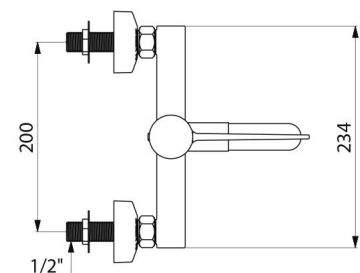

Norms



Warranty

