

# SECURITHERM BIOCLIP

## thermostatic basin mixer

Ref. H960515

Single hole sequential thermostatic mixer H. 95mm L. 120mm

### DESCRIPTION

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H960515**

Deck-mounted SECURITHERM thermostatic basin mixer.  
Sequential thermostatic mixer: opens and closes with cold water.  
No risk of cross flow between the hot and cold water.  
No non-return valve.  
BIOCLIP: mixer can be easily removed for cleaning and disinfection.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with curved spout, H. 95mm L. 120mm, fitted with a hygienic flow straightener, no build-up of impurities and withstands thermal shocks.  
Scale-resistant sequential thermostatic cartridge for single control adjustment of flow rate and temperature.  
Temperature adjusts from cold water up to 40°C with maximum temperature limiter set at 40°C.  
Tested without water to comply with NHS requirements. No pre-set temperature.  
Thermal and chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate limited to 5 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with F3/8" PEX flexibles with chrome-plated brass stopcocks, filters and Ø 15mm conical connectors.  
Fixing reinforced via 2 stainless steel rods.  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Mixer suitable for people with reduced mobility.  
30-year warranty.  
Also available with copper tails.

### TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H960515**

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Connector           | M1/2", Ø 15mm                                     |
| Technology          | SECURITHERM BIOCLIP sequential thermostatic mixer |
| Drop height         | 95mm                                              |
| Spout length        | 120mm                                             |
| Flow rate           | 5 lpm at 3 bar                                    |
| Temperature limiter | Yes                                               |
| Finish              | Chrome-plated brass                               |



### ADVANTAGES



Maximum hygiene: mixer with no non-return valves




Hygiene: can be removed for internal cleaning



SECURITHERM: optimal anti-scalding safety



Sequential: opens/closes with cold water

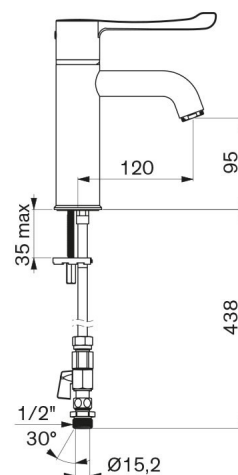

Norms



Warranty



Repairability

