

SECURITHERM thermostatic basin mixer

Ref. H960015L

Single hole, sequential thermostatic mixer H. 95mm L. 120mm



DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H960015L

Deck-mounted SECURITHERM thermostatic basin mixer.
 Sequential thermostatic mixer: opens and closes with cold water.
 No risk of cross flow between hot and cold water.
 No non-return valves on the inlets.
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
 Securitouch thermal insulation prevents burns.
 Single hole mixer with straight spout, H. 95mm L. 120mm, fitted with a hygienic flow straightener, no build-up of impurities and withstands thermal shocks.
 Scale-resistant thermostatic sequential cartridge for single control adjustment of flow rate and temperature.
 Adjustable temperature from cold water up to 40°C with maximum temperature limiter set at 40°C.
 Thermal and chemical shocks are possible.
 Spout and body with smooth interiors and low water volume.
 Flow rate limited to 5 lpm at 3 bar.
 No manual contact thanks to the Hygiene lever L. 100mm.
 Without pop-up waste
 PEX flexibles F3/8" with chrome-plated brass stopcocks, filters and Ø 15mm conical connectors.
 Reinforced fixing via 2 stainless steel rods.
 Mixer ideal for healthcare facilities, retirement and care facilities, hospitals and clinics.
 Mixer is suitable for people with reduced mobility.
 Mixer with 30-year warranty.
 Also available with copper tails.

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic basin mixer - Ref. H960015L

Connector	M1/2" Ø 15mm
Technology	SECURITHERM sequential Securitouch mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	 



ADVANTAGES



Sequential: opens/closes with cold water




Maximum hygiene: no non-return valves



SECURITHERM: optimal anti-scalding safety



Securitouch thermal insulation prevents burns

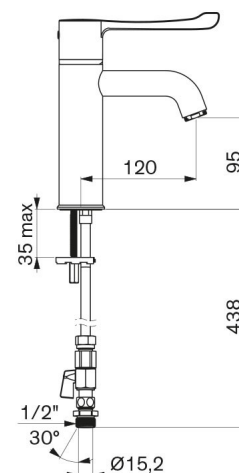

Warranty	
Repairability	