

SECURITHERM BIOCLIP thermostatic sink mixer

Ref. H9611P

Wall-mounted thermostatic sequential mixer







DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9611P

Wall-mounted SECURITHERM thermostatic sink mixer.
 Thermostatic sequential mixer: opens and closes with cold water.
 No risk of cross flow between hot and cold water.
 No non-return valves on the inlets.
 Mixer supplied with 2 stainless steel spouts L. 136mm.
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
 Securitouch thermal insulation prevents burns.
 Scale-resistant thermostatic cartridge for sequential control of flow rate and temperature.
 Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
 Thermal or chemical shocks are possible.
 Body and spout with smooth interiors and low water volume.
 Flow rate regulated at 7 lpm.
 Chrome-plated brass body.
 No manual contact thanks to Hygiene control lever L. 146mm.
 Mixer with 150mm centres, supplied with 2 in-line STOP/CHECK connectors ideal for hospitals.
 Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
 Sequential mixer suitable for people with reduced mobility.
 Mixer with 30-year warranty.

ADVANTAGES



-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  Removable spout: reduces bacterial development
-  SECURITHERM: optimum anti-scalding safety

TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9611P

| | |
|---------------------|--------------------------------------|
| Connector | M1/2" |
| Technology | SECURITHERM BIOCLIP sequential mixer |
| Height | 141mm |
| Width | 184mm |
| Spout length | 136mm |
| Flow rate | 7 lpm |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |

Norms

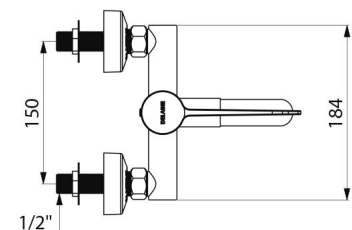

Warranty

