

Aluminium shower panel with SECURITHERM sequential mixer

Ref. H963615

Thermostatic shower panel with mixer and no non-return valves

DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. **H963615**

SECURITHERM anodised aluminium shower panel for wall-mounted exposed installation.
SECURITHERM thermostatic sequential shower mixer (non-time flow).
Thermostatic sequential shower mixer: opens and closes with cold water.
Mixer with no non-return valves on the inlets (reduces bacterial proliferation).
No risk of cross flow between the hot and cold water.
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.
Cold water failsafe prevents cold showers: shuts off automatically if hot water supply fails.
Temperature control from cold water up to 39°C.
Temperature limiter set at 39°C, can be adjusted.
Thermal shocks are possible.
Flow rate 9 lpm at 3 bar.
Sliding handset on chrome-plated rail with flexible shower hose removable with push fit rapid STOP connector.
Hygiene control lever L. 100mm.
Top inlets with M1/2" inline stopcocks.
Copper tubes.
Concealed fixings. Filters.
Shower panel suitable for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
30-year warranty.

TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. **H963615**

Supply	Top inlets via inline stopcocks M1/2"
Connector	M1/2", Ø 15mm
Technology	SECURITHERM single control thermostatic mixer
Height	1045mm
Width	210mm
Flow rate	9 lpm
Temperature limiter	39°C
Finish	Aluminium



ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Maximum hygiene: no non-return valves



Thermostatic: total temperature stability



Sequential: open and closing on cold water

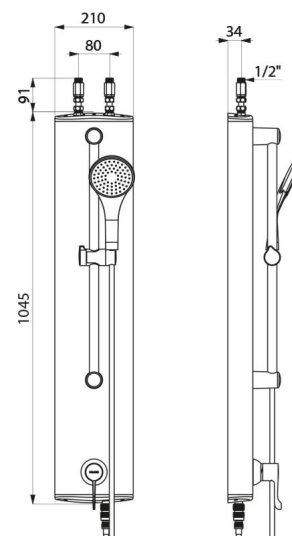

Warranty

