

# SECURITHERM dual control shower panel

Ref. 792334

Time flow thermostatic and mechanical dual control

## DESCRIPTION

**SECURITHERM dual control shower panel - Ref. 792334**

Dual control thermostatic shower panel:  
Large model satin stainless steel shower panel for wall mounted, exposed installation.  
With concealed inlet via flexibles, M $\frac{1}{2}$ ".  
SECURITHERM thermostatic shower mixer.  
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.  
Anti-scalding failsafe: automatic shut-off if cold water fails.  
Anti-cold showers function: automatic shut-off if hot water fails.  
Chrome-plated, tamperproof, scale-resistant, fixed, ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.  
Handset with removable flexible via push-fit rapid STOP connector, wall support supplied.  
Time flow valve ~30 seconds with soft-touch operation to control the ROUND shower head  
Non-time flow valve to control the handset with flexible hose.  
Stopcocks.  
Concealed fixings.  
Filters and non-return valves.  
This product is compatible with thermal and chemical shocks in accordance with current guidelines.  
Shower panel suitable for people with reduced mobility.  
30-year warranty.

## TECHNICAL CHARACTERISTICS

**SECURITHERM dual control shower panel - Ref. 792334**

Connector	M $\frac{1}{2}$ "
Technology	Non-time flow and time flow
Height	1,220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel

Norms



## ADVANTAGES



Thermostatic temperature regulation




Immediate shut-off if cold water fails



Fixed or handheld shower head



Stainless steel body, brass controls

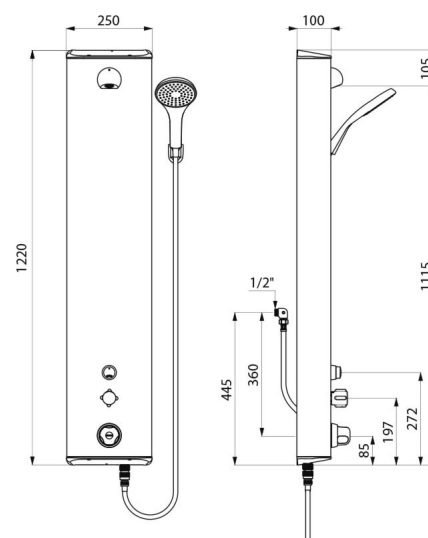

Warranty

