SECURITHERM thermostatic sink mixer

Ref. H9612

Single hole thermostatic mixer with retracting hand spray

DESCRIPTION

SECURITHERM thermostatic sink mixer - Ref. H9612

Deck-mounted SECURITHERM thermostatic basin mixer, ideal for baby baths.
Sequential thermostatic mixer: opens and closes with cold water.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Single hole mixer with swivelling outlet H. 110mm L. 200mm.
Sequential mixer with retracting hand spray with 2 jet options: flow straightener/rain effect.
Scale-resistant sequential thermostatic cartridge for sequential control of the flow rate and temperature.
Temperature control from cold water up to 40°C with maximum temperature limiter set at 40°C.
Body with smooth interior.
Flow rate regulated at 4 lpm.
No manual contact thanks to Hygiene control lever L. 100mm.
BIOSAFE flexible shower hose reduces bacterial proliferation: transparent polyurethane, smooth interior and exterior.
Flexible with narrow interior Ø 6mm: low water volume.
Specific counterweight.
PEX flexibles F3/8".
Fixing reinforced by 2 stainless steel rods.
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
30-year warranty.

ADVANTAGES

- Sequential: opens/closes with cold water
- Hygiene: no non-return valves
- SECURITHERM: Optimal anti-scalding safety
- Hygiene: transparent flexible with smooth interior

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic sink mixer - Ref. H9612

Connector	F3/8"
Technology	SECURITHERM Securitouch sequential mixer
Drop height	110mm
Spout length	200mm
Flow rate	4 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

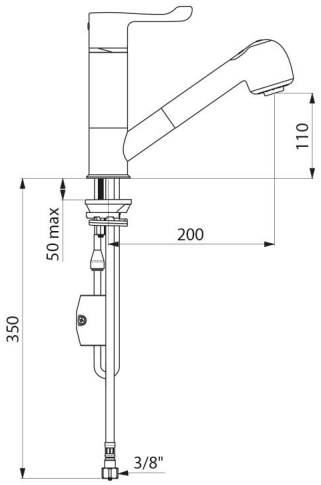

Norms	ACS
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY