

SECURITHERM thermostatic sink mixer set

Ref. H9613

Sequential mixer and column set

DESCRIPTION

SECURITHERM thermostatic sink mixer set - Ref. H9613

SECURITHERM thermostatic sequential sink mixer set and column with retracting hand spray.

Ideal for baby baths.

Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.

Securitouch thermal insulation prevents burns.

Sequential: opens and closes with cold water.

No risk of cross flow between the hot and cold water.

No non-return valves on the inlets.

Swivelling column H. 200mm L. 200mm.

Retracting hand spray with 2 jet options: flow straightener/rain effect.

Scale-resistant thermostatic sequential cartridge for single control temperature and flow-rate adjustment.

Temperature can be adjusted from cold water to 40°C with maximum temperature limiter set at 40°C.

Body and column with smooth interiors.

Flow rate regulated at 7 lpm.

No manual contact thanks to Hygiene control lever L. 100mm.

Mixed water brass outlet L. 160mm.

BIOSAFE flexible shower hose reduces bacterial proliferation: transparent polyurethane, smooth interior and exterior.

Hose with narrow diameter (internal Ø 6mm): low water volume.

Specific counterweight.

PEX flexibles F3/8" and reinforced fixing via 2 stainless steel rods.

Ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Suitable for people with reduced mobility.

30-year warranty.

TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic sink mixer set - Ref. H9613

Connector	F3/8"
Technology	SECURITHERM sequential Securitouch
Drop height	200mm
Spout length	200mm
Flow rate	7 lpm
Temperature limiter	40°C
Finish	Chrome-plated brass



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Hygiene: no non-return valves
-  SECURITHERM: Optimal anti-scalding safety
-  Sequential open and closing on cold water

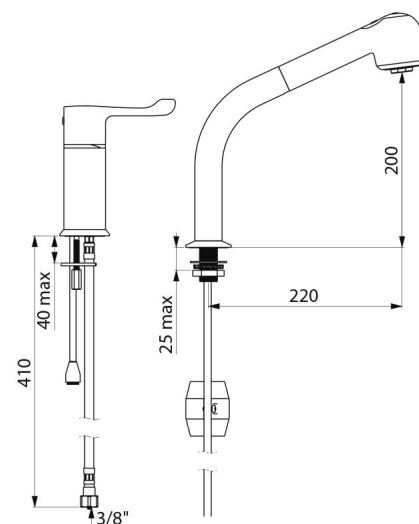

Norms	  
Warranty	
Repairability	