

# Pressure-balancing mixer with retracting hand spray

Ref. 2211LEP

Single hole mechanical EP mixer with retracting hand spray

## DESCRIPTION

**Pressure-balancing mixer with retracting hand spray - Ref. 2211LEP**

Deck-mounted mechanical sink mixer with pressure-balancing suitable for baby baths.

Single hole mixer with retracting hand spray with swivelling spout H. 100mm L. 200mm.

Ø 40mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.

Total anti-scalding safety: HW flow rate is reduced if CW supply fails (and vice versa).

Stable temperature regardless of variations in pressure and flow rate. Securitouch thermal insulation prevents burns.

Mechanical mixer with retracting hand spray with 2 jet options: flow straightener / rain effect.

Body with smooth interior.

Flow rate 7 lpm at 3 bar.

Chrome-plated brass body and Hygiene control lever.

BIOSAFE flexible shower hose reduces bacterial proliferation: transparent polyurethane flexible hose ensures replacement if biofilm is present, smooth interior and exterior.

Narrow flexible (interior Ø 6mm), low water volume.

Specific counterweight.

F $\frac{3}{8}$ " PEX flexibles with filters and non-return valves.

Fixing reinforced by 2 stainless steel rods.

SECURITHERM mechanical mixer with pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

30-year warranty.

## TECHNICAL CHARACTERISTICS

**Pressure-balancing mixer with retracting hand spray - Ref. 2211LEP**

|                     |                                 |
|---------------------|---------------------------------|
| Connector           | F3/8"                           |
| Technology          | SECURITHERM EP mechanical mixer |
| Drop height         | 100mm                           |
| Spout length        | 200mm                           |
| Flow rate           | 7 lpm at 3 bar                  |
| Temperature limiter | Yes                             |
| Finish              | Chrome-plated brass             |



## ADVANTAGES



HW flow rate reduced if CW fails




Hygiene: transparent flexible with smooth interior



Hygiene control lever requires no manual contact



Comfort: retracting hand spray, 2 jet options

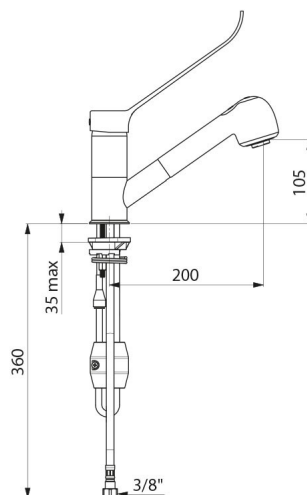

|               |                                                                                                                                                                                                                                                                                                                                         |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Norms         |     |
| Warranty      |                                                                                                                                                                                                                                                        |
| Repairability |                                                                                                                                                                                                                                                        |