

# SECURITHERM shower panel

Ref. 792413CF

Electronic thermostatic battery-operated

## DESCRIPTION

**SECURITHERM shower panel - Ref. 792413CF**

SECURITHERM electronic thermostatic shower panel:  
 Large model stainless steel panel for wall-mounted, exposed installation.  
 Concealed inlet via flexibles M $\frac{1}{2}$ ".  
 SECURITHERM thermostatic shower mixer.  
 Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.  
 Anti-scalding failsafe: automatic shut-off if cold water fails.  
 Anti-cold showers function: automatic shut-off if hot water fails.  
 Thermal shocks are possible.  
 Battery-operated with CR-P2 223 6V Lithium battery.  
 Shower starts when hand is 4cm from the infrared sensor.  
 Shuts off voluntarily or automatically after ~60 seconds.  
 Duty flush (~60 seconds every 24 hours after last use).  
 Flow rate 6 lpm at 3 bar.  
 Chrome-plated, tamperproof ROUND shower head with scale-resistant nozzle and automatic flow rate regulation.  
 Concealed fixings.  
 Filters and non-return valves.  
 M $\frac{1}{2}$ " stopcocks.  
 Electronic shower panel suitable for people with reduced mobility.  
 30-year warranty.

## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel - Ref. 792413CF**

Supply	6V battery
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	ACS



## ADVANTAGES



Total hygiene: operate without manual contact




Duty flush prevents bacterial proliferation



Thermostatic temperature regulation



Immediate shut-off if cold water fails

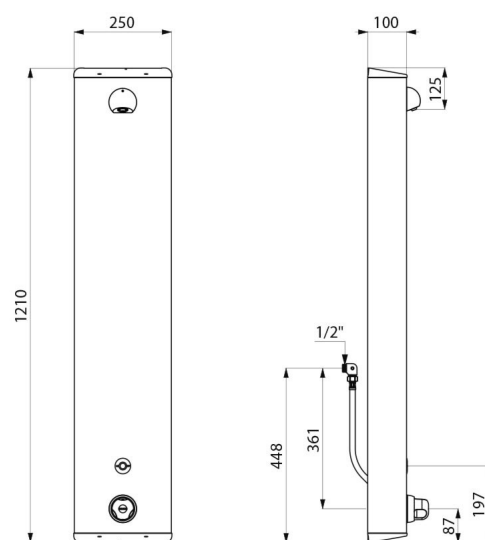

Warranty

