

# Securitouch mechanical shower mixer

Ref. 2739T

Wall-mounted single control mixer, solid control lever



## DESCRIPTION

**Securitouch mechanical shower mixer - Ref. 2739T**

Wall-mounted single control mechanical shower mixer.  
Wall-mounted single control with Securitouch thermal insulation to prevent burns.

Ø 40 classic ceramic cartridge with pre-set maximum temperature limiter.  
Body with smooth interior and low water volume (reduces bacterial development).

No risk of cross flow between the hot and cold water.

No non-return valves on the inlets.

Flow rate regulated at 9 lpm.

Chrome-plated brass body and solid control lever.

M1/2" shower outlet with integrated non-return valve.

Mixer with offset STOP/CHECK connectors M1/2" M3/4".

Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Shower mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

## ADVANTAGES



Hygiene: smooth interior reduces bacteria



Securitouch thermal insulation prevents burns



Maximum hygiene: low water volume.




Ergonomic: solid lever is easy to grip

## TECHNICAL CHARACTERISTICS

**Securitouch mechanical shower mixer - Ref. 2739T**

|                     |                          |
|---------------------|--------------------------|
| Connector           | M1/2"                    |
| Technology          | Securitouch shower mixer |
| Width               | 182mm                    |
| Flow rate           | 9 lpm                    |
| Temperature limiter | Yes                      |
| Finish              | Chrome-plated brass      |

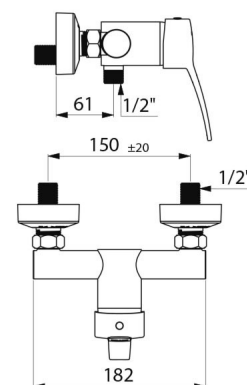

Norms

ACS

WRAS



Warranty



Repairability

