


TEMPOMIX 3 time flow mixer

Ref. 794165

Soft-touch operation, stopcocks

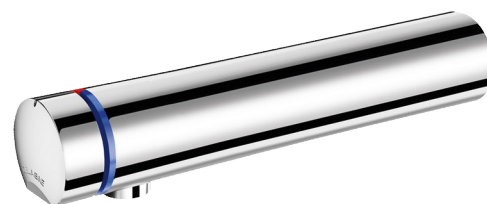

DESCRIPTION

TEMPOMIX 3 time flow mixer - Ref. 794165

Wall-mounted single control time flow basin mixer:
Soft-touch operation.
Temperature control and operation via the push-button.
Time flow pre-set at ~7 seconds, adjustable from 6 to 9 seconds.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 3 - 6 lpm.
Tamperproof, scale-resistant flow straightener.
Chrome-plated metal body L. 190mm.
For cross wall installation.
PEX flexibles F3/8" with stopcocks, filters and non-return valves.
Adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
30-year warranty.

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 time flow mixer - Ref. 794165

Connector	F3/8"
Technology	Time flow
Spout length	190mm
Flow rate	3 lpm
Norms	   
Warranty	

ADVANTAGES



Exceptional water savings: 85%



Soft-touch operation



Solid brass; install behind the partition



Sleek design

