

# TEMPOFIX 3 frame system for urinals

Ref. 543100

Electronic urinal valve with mains supply

## DESCRIPTION


TEMPOFIX 3 frame system for urinals - Ref. 543100


Frame system with electronic urinal valve:  
Black powder-coated steel frame for wall-mounted installation.  
Fixes to floor and load-bearing walls, anchoring bolts supplied.  
Adjustable bracket 95 - 280mm.  
Frame height can be adjusted 0 - 200mm.  
Ø 50mm soil pipe with waterproof seal.  
Delivered pre-mounted.  
Compatible with solid wall finishes from 40 - 190mm.

Fitted with a TEMPOMATIC M½" electronic urinal valve:  
Mains supply, 12V electronic control unit with solenoid valve, filter and stopcock.  
Shock-resistant infrared presence detection sensor.  
Detection distance, time flow and flow rate can be adjusted during installation.  
Install a 230/12V transformer.  
Detection delay is 3 seconds.  
Automatic pre-rinse is possible.  
Time flow pre-set at 3 seconds, can be adjusted from 3 - 12 seconds.  
Hygienic duty flush every 24 hours after the last use: prevents vacuums.  
Flow rate 0.3 L/sec. at 3 bar, can be adjusted.  
Wall plate is flush to the wall.  
Threaded rods can be cut to size.  
Compatible with rain water.  
Suitable for people with reduced mobility.  
Technical features: see TEMPOMATIC urinal valve ref. 428200.  
30-year warranty.

## TECHNICAL CHARACTERISTICS

TEMPOFIX 3 frame system for urinals - Ref. 543100

Supply	Mains supply 230/12V
Connector	½"
Technology	Electronic
Height	985 - 1385mm
Depth	160 - 220mm
Width	430mm
Warranty	

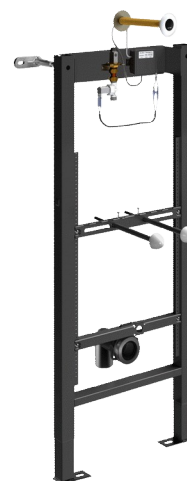

## ADVANTAGES



Total hygiene: no manual contact



ECO time flow set at 3 seconds



Cross wall installation



Hygienic duty flush

