


# TEMPOMATIC 3 electronic tap

Ref. 443016

Integrated battery

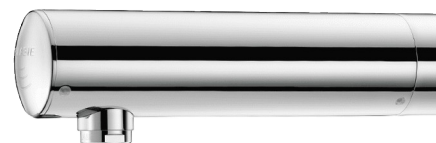

## DESCRIPTION

**TEMPOMATIC 3 electronic tap - Ref. 443016**

Electronic basin tap for panels:

Battery-operated with integrated 223 6V Lithium batteries.

Reduced-stagnation solenoid valve and electronic unit integrated into the body of the tap.

Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.

Scale-resistant flow straightener.

Duty flush (~60 seconds every 24 hours after last use).

Active, infrared presence detection, sensor at the end of the spout optimises detection.

Chrome-plated solid brass body.

Cap fixed in place by 2 concealed screws, with pictogram to identify the sensor easily.

For installation on panels from 1 to 4mm.

Ø 50mm, L. 190mm.

Anti-blocking security.

Suitable for people with reduced mobility.

30-year warranty.

## ADVANTAGES



Total hygiene: no manual contact



90% water savings



Battery integrated in the tap body



Anti-bacterial proliferation duty flush

## TECHNICAL CHARACTERISTICS

**TEMPOMATIC 3 electronic tap - Ref. 443016**

|              |                                                                                         |
|--------------|-----------------------------------------------------------------------------------------|
| Supply       | 6V battery                                                                              |
| Connector    | M1/2"                                                                                   |
| Technology   | Electronic                                                                              |
| Spout length | 190mm                                                                                   |
| Flow rate    | 3 lpm                                                                                   |
| Norms        | ACS  |
| Warranty     |      |

