

TEMPOMATIC 4 urinal valve

Ref. 479416

Electronic with integrated batteries

DESCRIPTION

TEMPOMATIC 4 urinal valve - [Ref. 479416](#)

Exposed electronic urinal valve with integrated batteries:
 Battery-operated with integrated CR 123 6V Lithium batteries.
 For wall-mounted, exposed installation.
 Reduced-stagnation solenoid valve and electronic unit integrated into the valve body.
 Shockproof infrared presence detection sensor.
 Detection delay is 10 sec.
 3 programmes (rinsing volume adjustable in accordance to the type of urinal).
 High-frequency mode (exclusive to DELABIE):
 - short rinse after each user
 - complementary rinse after busy period.
 Hygienic duty flush, every 24hr after last use, prevents vacuums in the siphon.
 Compatible with rain water.
 Flow rate 0.15 L/sec. at 3 bar, can be adjusted.
 Integrated stopcock and flow rate adjuster.
 One-piece chrome-plated metal body.
 M $\frac{1}{2}$ " connection.
 Angled for recessed supply with Ø 35mm neck tube.
 For non-standard urinals: 30mm gap from wall.
 Suitable for people with reduced mobility.
 30-year warranty.

Ideal for replacing old installations:
 Can easily be installed where there was previously a time flow urinal.

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 urinal valve - [Ref. 479416](#)

Supply	6V batteries
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	450mm
Depth	85mm
Flow rate	0.15 l/sec
Width to the wall	50mm
Norms	CE



ADVANTAGES



Total hygiene: no manual contact




High-frequency mode



Batteries integrated into the valve body



Hygienic duty flush

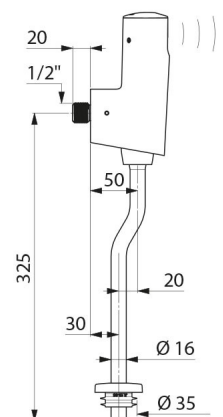

Warranty

