

SECURITHERM EP pressure-balancing basin mixer

Ref. 2564T3EP

Tall single hole, single control mixer with EP cartridge

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2564T3EP

Deck-mounted SECURITHERM pressure-balancing sink mixer. Single hole and single control mixer with swivelling spout H. 305mm L. 140mm.

Tall mixer with hygienic flow straightener suitable for fitting a BIOFIL point-of-use filter.

Anti-scalding safety: HW flow reduces if CW supply fails (and vice versa). Stable temperature regardless of pressure and flow rate variations in the system.

Ø 35mm ceramic cartridge with pressure balancing and pre-set maximum temperature limiter.

Body and spout with smooth interiors (reduces bacterial development).

Thermal shocks are possible without removing the control lever or shutting off the cold water.

Flow rate limited to 9 lpm at 3 bar.

Chrome-plated brass body and base.

Hygiene control lever L. 185mm requires no manual contact.

PEX flexibles F3/8" with filters and non-return valves.

Fixings reinforced via 2 stainless steel rods and back-nuts.

Mechanical mixer with pressure-balancing ideal for healthcare facilities, care and retirement homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS


SECURITHERM EP pressure-balancing basin mixer - Ref. 2564T3EP

Connector	F3/8"
Technology	SECURITHERM EP mixer
Height	462mm
Drop height	305mm
Spout length	140mm
Flow rate	9 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass

Norms

ACS

WRAS

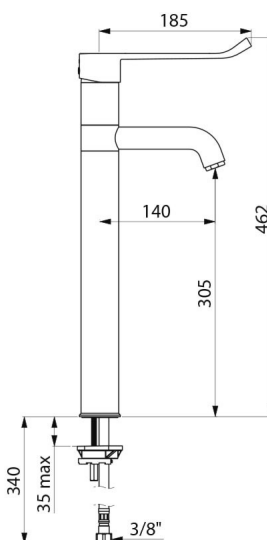

ADVANTAGES



EP: HW flow reduces if CW supply fails



EP: reduces pressure variations



Thermal shocks are possible without removing lever



Hygiene: smooth interior reduces bacteria

Warranty	
Repairability	