

SPORTING 2 SECURITHERM electronic shower panel

Ref. 714910

Mains, thermostatic, rain-effect spray, kit 2/2

DESCRIPTION

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910

SPORTING 2 SECURITHERM, thermostatic electronic shower panel:
 Recessed inlets.
 Anodised aluminium and chrome-plated satin finish panel.
 Mains supply 230/6V.
 Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).
 Shuts off voluntarily or automatically after ~60 seconds.
 Duty flush (~60 seconds every 24 hours after the last use).
 Flow rate 6 lpm at 3 bar, comfortable rain-effect spray.
 Tamperproof, fixed shower head with automatic flow rate regulation.
 Accessible filters and non-return valves.
 Integrated stopcocks.
 M $\frac{1}{2}$ " connections (compact nanny joint, kit 1/2).
 Electronic shower panel suitable for people with reduced mobility.
 30-year warranty.
SECURITHERM technology:
 Thermostatic shower mixer directly integrated in the head of the shower panel.
 Temperature set by the installer.
 Stable temperature, pre-set at 38°C.
 Anti-scalding failsafe: automatic shut-off if the cold water fails.
 Prevents cold showers: automatic shut-off if the hot water fails.
 Order with nanny joint reference 714012.

TECHNICAL CHARACTERISTICS

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910

Supply	Mains supply 230/6V
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1020mm
Depth	21mm
Width	70mm
Flow rate	6 lpm
Finish	Aluminium



ADVANTAGES



Exceptional water savings: 80%




Anti-bacterial proliferation duty flush



Immediate shut-off if cold water fails



Sleek shapes, concealed fixings

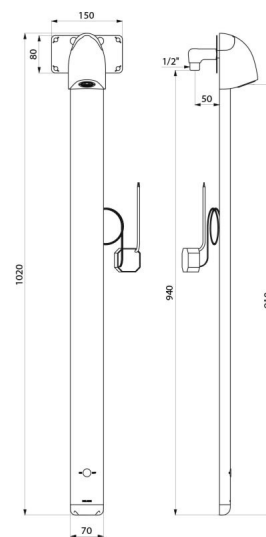

Norms

ACS



Warranty

