

# SPORTING 2 SECURITHERM electronic shower panel

Ref. 714916

Battery-operated, thermostatic, scale-resistant nozzle

## DESCRIPTION

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916**

SPORTING 2 SECURITHERM, thermostatic electronic shower panel, kit 2/2:  
Recessed inlets.  
Anodised aluminium and chrome-plated satin finish panel.  
Slimline structure with concealed fixings  
Battery-operated with CR123 6V Lithium batteries.  
Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).  
Shuts off voluntarily or automatically after ~60 seconds.  
Duty flush (~60 seconds every 24 hours after the last use).  
Flow rate 6 lpm at 3 bar.  
Tamperproof, scale-resistant fixed shower head with automatic flow rate regulation.  
Accessible filters and non-return valves.  
Integrated stopcocks.  
M $\frac{1}{2}$ " recessed connections.  
Electronic shower panel suitable for people with reduced mobility.  
30-year warranty.  
SECURITHERM technology:  
Thermostatic mixer directly integrated in the head of the shower panel.  
Temperature set by the installer.  
Stable temperature, pre-set at 38°C.  
Anti-scalding failsafe: automatic shut-off if the cold water fails.  
Anti-cold showers function: automatic shut-off if the hot water fails.  
Order with support bracket 714612.

## TECHNICAL CHARACTERISTICS

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916**

Supply	CR123 6V Lithium batteries
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1020mm
Depth	21mm
Width	70mm
Flow rate	6 lpm
Finish	Aluminium
Norms	ACS WRAS



## ADVANTAGES



80% water savings




Anti-bacterial proliferation duty flush



Immediate shut-off if cold water fails



Sleek shapes, concealed fixings

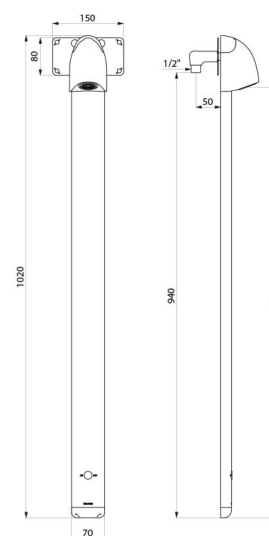

Warranty

