

SECURITHERM EP pressure-balancing basin mixer

Ref. 2521EP

Single hole mechanical mixer H. 85mm, L. 135mm

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2521EP

Deck-mounted mechanical basin mixer with pressure-balancing basin. Single hole mechanical mixer with spout H. 85mm L. 135mm fitted with a BIOSAFE hygienic spout outlet.

Ø 40mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.

Anti-scalding safety: HW flow rate is reduced if cold water supply fails (and vice versa).

Stable temperature regardless of pressure and flow rate in the system.

Flow rate limited to 5 lpm at 3 bar.

Sculptured control lever.

Without pop-up waste.

PEX flexibles F3/8" with filters and non-return valves.

Fixing reinforced by 2 stainless steel rods.

Mechanical mixer with SECURITHERM pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 2521EP

Connector	F3/8"
Technology	SECURITHERM EP BIOSAFE mechanical mixer
Height	165mm
Drop height	85mm
Spout length	135mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass

Norms	ACS	BELGAQUA	DVGW	ISO 9001
	BSI	EN 10222-2	EN 10222-2	EN 10222-2
Warranty	30 YEAR WARRANTY			



ADVANTAGES



HW flow rate reduced if CW fails




EP: reduces temperature variations



Hygiene: BIOSAFE hygienic outlet with no grid



Ergonomic: sculptured lever is easy to grip

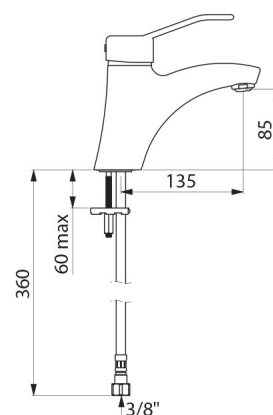

Repairability

