

BIOSAFE mechanical basin mixer

Ref. 2621MINI

Single hole mechanical mixer with no spout H. 50mm L. 80mm

DESCRIPTION

BIOSAFE mechanical basin mixer - Ref. 2621MINI

Deck-mounted mechanical basin mixer
Single hole mechanical mixer H. 50mm L. 80mm.
No spout: hygienic flow straightener integrated into the body.
Securitouch thermal insulation prevents burns.
Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Thermal shocks are possible without removing the control lever or shutting off the cold water supply.
Body with smooth interior and very low water volume (reduces bacterial development).
Flow rate set at 4 lpm.
Solid control lever.
Without pop-up waste.
PEX flexibles F3/8" with rotating unions.
Fixing reinforced by two stainless steel rods.
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
Mixer with 30-year warranty.
Also available with copper tails.

TECHNICAL CHARACTERISTICS

BIOSAFE mechanical basin mixer - Ref. 2621MINI

Connector	F3/8"
Technology	BIOSAFE mechanical mixer
Drop height	50mm
Spout length	80mm
Flow rate	4 lpm
Temperature limiter	Yes
Finish	Chrome-plated stainless steel



ADVANTAGES



Hygiene: body with very low water volume




Maximum hygiene: mixer with no spout



Thermal shocks are possible without removing lever



Pre-set maximum temperature limiter

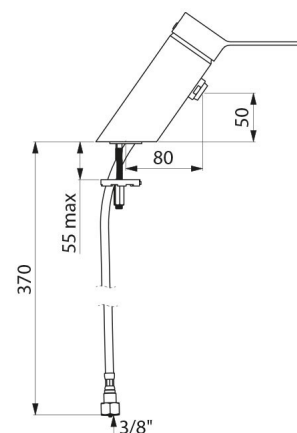

Norms

ACS

WRAS

DNV GL

Water Supply Department



Warranty	
Repairability	