

BIOSAFE mechanical basin mixer

Ref. 2921L

Single hole mechanical mixer H. 100mm L. 110mm

DESCRIPTION

BIOSAFE mechanical basin mixer - Ref. 2921L

Deck-mounted mechanical basin mixer.
 Single hole mixer with spout H. 100mm L. 110mm with a BIOSAFE hygienic outlet.
 Spout suitable for fitting a BIOFIL point-of-use filter.
 Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.
 Spout with a tube with a smooth interior, no niches where bacteria can develop, and low water volume.
 The speed with which the water flows through the tube considerably reduces biofilm development.
 No risk of cross flow between the hot and cold water.
 No non-return valves on the inlets.
 Thermal shocks are possible without removing the lever or shutting off the cold water supply.
 Body with very low water volume (reduces bacterial development).
 Flow rate regulated at 5 lpm.
 Hygiene control lever L. 150mm.
 No pop-up waste.
 3/8" rotating PEX flexibles.
 Fixing reinforced via 2 stainless steel rods.
 Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
 Single hole mixer suitable for people with reduced mobility.
 No risk of cross flow between the hot and cold water.
 No non-return valves on the inlets.
 Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS





BIOSAFE mechanical basin mixer - Ref. 2921L


Connector	F3/8"
Technology	BIOSAFE
Drop height	100mm
Spout length	110mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

Norms **ACS** 



ADVANTAGES

-  Hygiene: body with very low water volume
-  Thermal shock without removing the control lever
-  Pre-set maximum temperature limiter
-  Hygiene control lever requires no manual contact

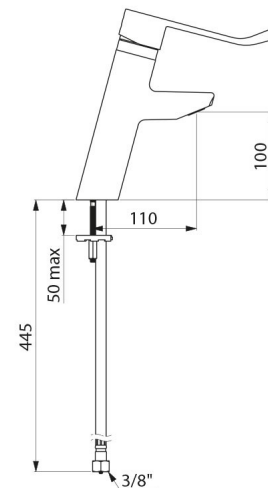

Warranty



Repairability

