TEMPOFLUX 3 AB flush kit

Ref. 763266

Anti-blocking direct flush WC kit

DESCRIPTION

TEMPOFLUX 3 AB flush kit - Ref. 763266

Flush system without cistern: directly connected to pipework.
For walls ≤ 200mm.
Soft-touch operation.
AB anti-blocking system: flush only takes place once the push-button is released.
Time flow ~7 seconds.
Vacuum breaker.
Stopcock and volume/flow rate adjustment, activation unit and cartridge are all integrated and accessible via the service duct.
Chrome-plated metal push-button.
Shock-resistant mechanism.
In-line inlet M¾".
Complies with European standard EN 12541 (class II acoustic level).
Cut-to-size threaded rod.
Upstream supply pipes: minimum Ø 20mm required at all points (including connectors).
Base flow rate: 1L/sec at 1 bar dynamic pressure.
With Ø 32mm PVC flush tube.
Compatible with rain water.
Suitable for rimless WC pans without flow rate regulation and suitable for people with reduced mobility.
30-year warranty.

ADVANTAGES

- Anti-blocking system
- Cross wall installation
- Flush is powerful and instantly available
- Direct flush: limits the risk of leaks

TECHNICAL CHARACTERISTICS

TEMPOFLUX 3 AB flush kit - Ref. 763266
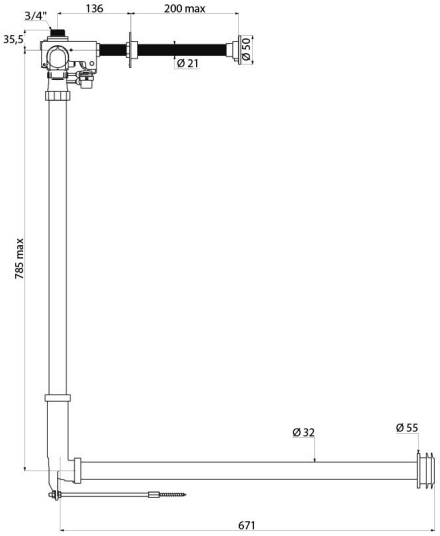
Connector	¾"
Technology	Time flow
Norms	WRAS, BELGAQUA
Warranty	30 YEAR WARRANTY