

TEMPOFLUX 3 AB side control flush system

Ref. 763300

Time flow valve AB, soft-touch side control, recessed



DESCRIPTION

TEMPOFLUX 3 AB side control flush system - Ref. 763300

Flush system without cistern: directly connected to pipework. Satin stainless steel access plate to mechanism 186 x 186mm. Satin stainless steel time flow control plate and chrome-plated buttons 90 x 90mm.

Control plate is installed manually via hidden screws.

Recessed waterproof housing:

- Collar with waterproof seal.
- Hydraulic connection to the outside and maintenance from the front.
- Compatible with wall finishes from 10 - 120mm (while maintaining the minimum recessing depth of 93mm).
- Suitable for standard or "pipe-in-pipe" supply.
- Stopcock and flow rate adjustment are integrated and accessible from the front.
- Cartridge and filter are accessible from the front.
- TEMPOFLUX 3 F $\frac{3}{4}$ " valve compatible with rain water.
- Backflow prevention device inside the housing.

Soft-touch operation.

AB anti-blocking system: water will flow only when the push-button is released.

3L/6L dual flush can be adjusted to 2L/4L.

Outlet connection for PVC tube Ø26/32mm.

Acoustic level complies with European standard EN 12541 class II.

Upstream supply pipes: minimum Ø 20mm required at all points (including connectors).

Base flow rate: 1 L/sec at 1 bar dynamic pressure.

Suitable for rimless WC pans without flow rate regulation.

Suitable for people with reduced mobility

30-year warranty.


TECHNICAL CHARACTERISTICS

TEMPOFLUX 3 AB side control flush system - Ref. 763300

Connector	F $\frac{3}{4}$ "
Technology	Time flow side control
Length	186mm
Width	186mm
Finish	Satin stainless steel
Norms	

ADVANTAGES

-  Soft-touch side control, disabled-friendly
-  Satin stainless steel anti-blocking buttons/plates
-  Reliable system - Easy maintenance from front
-  3L/6L flush volume can be adjusted to 2L/4L

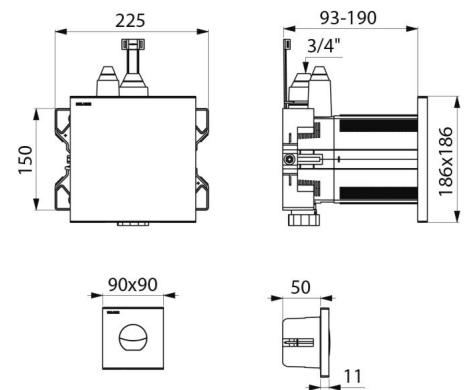

Warranty

