

SECURITHERM EP pressure-balancing basin mixer

Ref. 27216LEP

Single hole mechanical mixer H. 95mm L. 120mm

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 27216LEP

Deck-mounted mechanical basin mixer with pressure-balancing. Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic BIOSAFE outlet.

Ø 35mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.

Anti-scalding safety: HW flow rate is reduced if CW supply fails (and vice versa).

Stable temperature regardless of pressure and flow rate variations in the system.

Body and spout with smooth interiors (reduced bacterial development).

Thermal shocks are easy to undertake without removing the control lever or shutting off the water supply.

Flow rate limited to 5 lpm.

Hygiene control lever L. 150mm.

With no pop-up waste.

Copper tails supplied with chrome-plated brass stopcocks.

Fixing reinforced by two stainless steel rods.

SECURITHERM pressure-balancing mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

Also available with PEX flexibles.

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 27216LEP

| | |
|---------------------|---------------------------------|
| Connector | 1/2" |
| Technology | SECURITHERM EP mechanical mixer |
| Height | 95mm |
| Spout length | 120mm |
| Flow rate | 5 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |

Norms



Warranty



ADVANTAGES



HW flow rate reduced if CW supply fails




EP: reduces temperature variations



Hygiene: smooth interior reduces bacteria



Thermal shocks are possible without removing lever

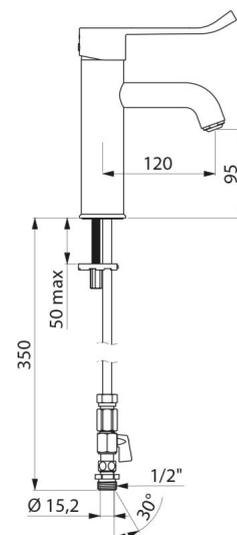

Repairability

