

SECURITHERM thermostatic basin mixer

Ref. H9600

Single hole sequential thermostatic mixer H.95mm L.120mm

2026 UK public price excluding VAT: £366.64

DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9600

Deck-mounted SECURITHERM thermostatic basin mixer.
Thermostatic sequential mixer: opens and closes with cold water.
No risk of cross flow between hot and cold water.
Mixer has no non-return valves on the inlets.
Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener.
Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate limited to 5 lpm at 3 bar.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
Supplied with F3/8" PEX flexibles with chrome-plated brass stopcocks.
Fixing reinforced via 2 stainless steel rods.
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.
Also available with copper tails.

TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic basin mixer - Ref. H9600

Connector	F3/8"
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	   



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

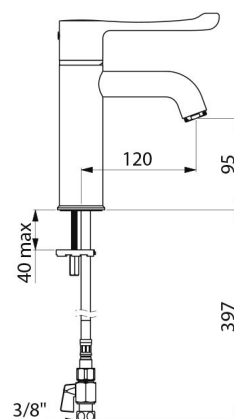

Warranty	
Repairability	