

# SECURITHERM thermostatic basin mixer

Ref. H9600

Single hole sequential thermostatic mixer H.95mm L.120mm

2026 UK public price excluding VAT: £366.64

## DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9600

Deck-mounted SECURITHERM thermostatic basin mixer.  
 Thermostatic sequential mixer: opens and closes with cold water.  
 No risk of cross flow between hot and cold water.  
 Mixer has no non-return valves on the inlets.  
 Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails.  
 Securitouch thermal insulation prevents burns.  
 Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener.  
 Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.  
 Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
 Thermal or chemical shocks are possible.  
 Body and spout with smooth interiors and low water volume.  
 Flow rate limited to 5 lpm at 3 bar.  
 No manual contact thanks to Hygiene control lever L. 146mm.  
 No pop-up waste.  
 Supplied with F3/8" PEX flexibles with chrome-plated brass stopcocks.  
 Fixing reinforced via 2 stainless steel rods.  
 Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Mixer suitable for people with reduced mobility.  
 Mixer with 30-year warranty.  
 Also available with copper tails.

## TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic basin mixer - Ref. H9600

|                     |  |
|---------------------|--|
| Connector           | F3/8"                                    |
| Technology          | SECURITHERM Securitouch sequential mixer |
| Drop height         | 95mm                                     |
| Spout length        | 120mm                                    |
| Flow rate           | 5 lpm at 3 bar                           |
| Temperature limiter | Yes                                      |
| Finish              | Chrome-plated brass                      |
| Norms               | ACS WRAS BSI                             |



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

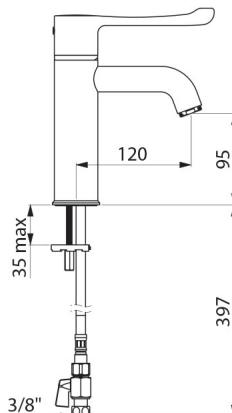

---

Warranty



---

Repairability

