

# Shower kit with thermostatic mixer

Ref. H9630KIT

Riser kit with thermostatic mixer with no non-return valves

2025 UK public price excluding VAT: £501.39

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9630KIT

Shower riser kit with thermostatic sequential mixer.  
Shower riser rail with SECURITHERM thermostatic shower mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
Mixer with no non-return valves on the inlets (reduces bacterial proliferation).  
No risk of cross flow between hot and cold water.  
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant, thermostatic sequential cartridge:  
Temperature control from cold water up to 39°C with maximum temperature limiter set at 39°C.  
Thermal shocks are possible.  
Body with smooth interior and low water volume.  
Flow rate regulated at 9 lpm.  
Chrome plated brass body and Hygiene lever L. 100mm.  
M1/2" bottom shower outlet.  
Wall-mounted mixer with offset STOP/CHECK connectors, M1/2" M3/4".  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics

- Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).
- Shower head retaining collar (ref. 830).

Suitable for people with reduced mobility.  
30-year warranty.

## TECHNICAL CHARACTERISTICS


Shower kit with thermostatic mixer - Ref. H9630KIT

|                     |                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------|
| Connector           | M1/2"                                                                                   |
| Technology          | SECURITHERM single control, Securitouch                                                 |
| Depth               | 185mm                                                                                   |
| Length              | 184mm                                                                                   |
| Flow rate           | 9 lpm                                                                                   |
| Temperature limiter | 39°C                                                                                    |
| Finish              | Chrome-plated brass                                                                     |
| Norms               | ACS  |



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Thermostatic: complete temperature stability

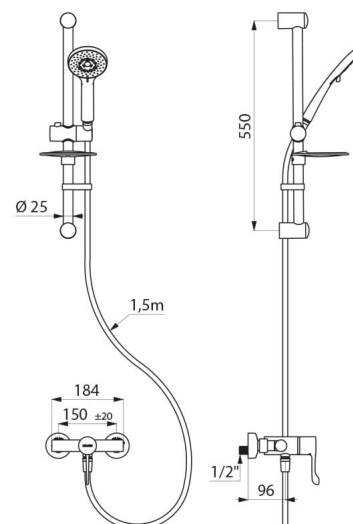

|               |                                                                                   |
|---------------|-----------------------------------------------------------------------------------|
| Warranty      |  |
| Repairability |  |