

Shower kit with thermostatic mixer

Ref. H9739SHYG

Securitouch dual control thermostatic mixer

2026 UK public price excluding VAT: £405.77

DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9739SHYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:

- Shower mixer with scale-resistant, thermostatic cartridge: Mixer with anti-scalding failsafe: shuts off automatically if cold supply fails. Prevents cold showers: shuts off automatically if hot water supply fails. Scale-resistant thermostatic cartridge for temperature adjustment. ¼-turn ceramic head for flow rate adjustment. Temperature adjusts from 25 - 40°C with maximum temperature pre-set at 38°C.
 - Thermal shocks are possible without removing the control knob or shutting off the cold water supply.
 - Flow rate limited to 9 lpm at 3 bar.
 - Chrome-plated brass body with CLASSIC controls.
 - M1/2" shower outlet.
 - Filters and non-return valves integrated on the F3/4" inlets.
 - Mixer with offset standard wall connectors, M1/2" M3/4".
 - Shower head (ref. 813) with chrome-plated wall-mounted tilting support (ref. 845).
 - Auto-draining device FM1/2" for installation between the flexible hose and the shower head, automatically drains the shower head and flexible hose (reduces bacterial development) (ref. 880).
- Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Shower mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS


Shower kit with thermostatic mixer - Ref. H9739SHYG

Connector	M1/2"
Technology	SECURITHERM thermostatic mixer
Depth	73mm
Length	281mm
Width	280mm
Flow rate	9 lpm
Temperature limiter	38°C
Finish	Chrome-plated brass



ADVANTAGES

-  SECURITHERM: Optimum anti-scalding safety
-  Pre-set maximum temperature limiter
-  Automatically drains shower head and flexible hose
-  Thermostatic: total temperature stability

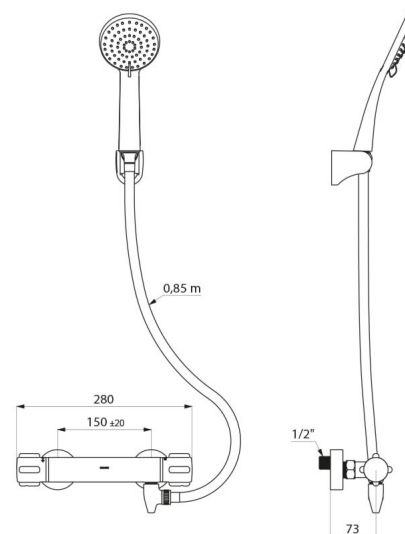

Norms	 
Warranty	
Repairability	