

# Shower kit with thermostatic mixer

Ref. H9741SKIT

Shower kit with thermostatic mixer

2025 UK public price excluding VAT: £466.97

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9741SKIT

Shower riser rail with thermostatic dual control mixer.  
Shower kit with SECURITHERM thermostatic shower mixer.  
Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.  
Prevents cold showers: shuts off automatically if hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant thermostatic cartridge adjusts the temperature.  
¾-turn ceramic valve head adjusts the flow rate.  
Temperature control from 25°C up to 41°C.  
Double temperature limiter: 1st limiter set at 38°C, 2nd limiter set at 41°C.  
Thermal shocks are possible without removing the control knob or shutting off the cold water.  
Flow rate regulated at 9 lpm.  
Chrome-plated body and ERGO controls.  
M1/2" shower outlet.  
Filters and non-return valves integrated in the inlets, F3/4".  
Mixer with offset standard wall connectors.  
• Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).  
• Shower head retaining collar (ref. 830).  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics  
Mixer suitable for people with reduced mobility.  
Shower kit with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9741SKIT

|                     |                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------|
| Connector           | M1/2"                                                                                   |
| Technology          | SECURITHERM Securitouch thermostatic mixer,                                             |
| Depth               | 84mm                                                                                    |
| Length              | 286mm                                                                                   |
| Flow rate           | 9 lpm                                                                                   |
| Temperature limiter | Yes                                                                                     |
| Finish              | Chrome-plated brass                                                                     |
| Norms               | ACS  |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Double maximum temperature limiter



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

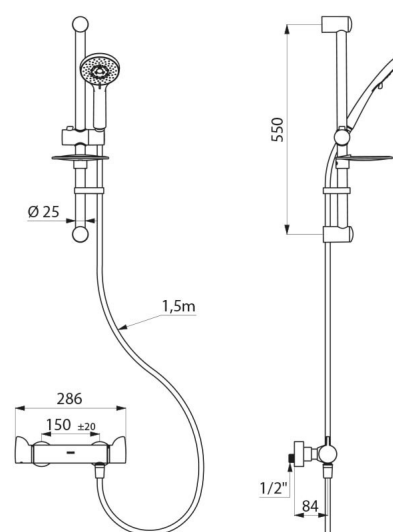

Warranty



Repairability

