Aluminium shower panel with SECURITHERM sequential mixer



Ref. H9639

Sequential thermostatic mixer

2026 UK public price excluding VAT: £776.29

DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9639

Anodised aluminium shower panel for wall-mounted exposed installation:
SECURITHERM sequential thermostatic mixer (non-time flow).
Adjustable temperature control from cold water up to 39°C; maximum temperature limiter set at 39°C, can be adjusted.
Anti-scalding failsafe: automatic shut-off if cold water supply fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.
Comfortable, rain-effect spray.
Hygiene control lever L. 100mm.
Top inlets with inline M1/2" stopcocks.
Concealed fixings.
Filters.
Suitable for people with reduced mobility.
30-year warranty.


ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- No non-return valves on inlets
- Thermostatic: total temperature stability
- Sequential open and closing on cold water

TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9639

Supply	Top inlets with M1/2" inline stopcocks
Connector	M1/2"
Technology	Sequential thermostatic SECURITHERM
Height	1050mm
Width	210mm
Flow rate	6 lpm
Temperature limiter	39°C
Finish	Aluminium
Norms	ACS
Warranty	30 YEAR WARRANTY

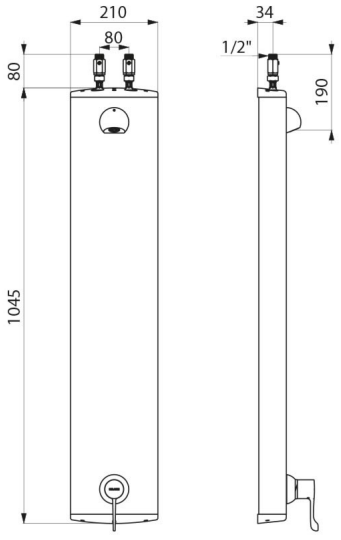

Repairability	