

# Aluminium shower panel with SECURITHERM sequential mixer

Ref. H9639

Sequential thermostatic mixer

2026 UK public price excluding VAT: £739.32

## DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. [H9639](#)

Anodised aluminium shower panel for wall-mounted exposed installation: SECURITHERM sequential thermostatic mixer (non-time flow). Adjustable temperature control from cold water up to 39°C; maximum temperature limiter set at 39°C, can be adjusted. Anti-scalding failsafe: automatic shut-off if cold water supply fails. Anti-cold showers function: automatic shut-off if hot water fails. Thermal shocks are possible. Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar. Comfortable, rain-effect spray. Hygiene control lever L. 100mm. Top inlets with inline M1/2" stopcocks. Concealed fixings. Filters. Suitable for people with reduced mobility. 30-year warranty.

## TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. [H9639](#)

Supply	Top inlets with M1/2" inline stopcocks
Connector	M1/2"
Technology	Sequential thermostatic SECURITHERM
Height	1050mm
Width	210mm
Flow rate	6 lpm
Temperature limiter	39°C
Finish	Aluminium
Norms	  
Warranty	



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




No non-return valves on inlets



Thermostatic: total temperature stability



Sequential open and closing on cold water

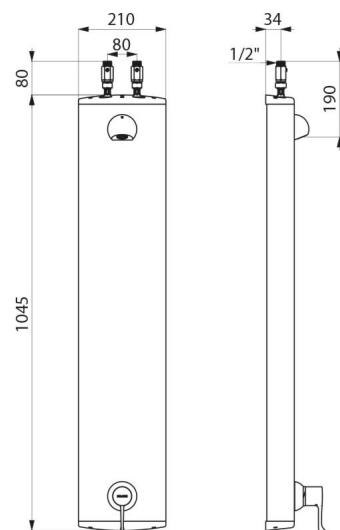

---

Repairability

---

