

# SECURITHERM shower panel

Ref. H9636

Thermostatic shower panel with mixer with no non-return valves

2024 UK public price excluding VAT: £816.32

## DESCRIPTION

SECURITHERM shower panel - Ref. H9636

SECURITHERM shower panel made from anodised aluminium for wall-mounted exposed installation:  
SECURITHERM sequential thermostatic shower mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
Mixer without non-return valves (reduces bacterial proliferation).  
No risk of cross flow between the hot and cold water.  
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.  
Cold water failsafe prevents cold showers: shuts off automatically if hot water supply fails.  
Adjustable temperature control from cold water up to 39°C.  
Maximum temperature limiter set at 39°C, can be adjusted.  
Thermal shocks are possible.  
Flow rate 9 lpm at 3 bar.  
Sliding handset on a chrome-plated riser rail with removable flexible hose via rapid push-fit STOP connector.  
Hygiene control lever L. 100mm.  
Top inlets with M1/2" stopcocks.  
Concealed fixings.  
Filters.  
Shower panel ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Suitable for people with reduced mobility.  
Shower panel with 30-year warranty.

## TECHNICAL CHARACTERISTICS


SECURITHERM shower panel - Ref. H9636

|                     |                                                                                                                                                                             |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply              | Top inlets with M1/2" inline stopcocks                                                                                                                                      |
| Connector           | M1/2"                                                                                                                                                                       |
| Technology          | Sequential thermostatic shower mixer                                                                                                                                        |
| Height              | 1045mm                                                                                                                                                                      |
| Width               | 210mm                                                                                                                                                                       |
| Flow rate           | 9 lpm                                                                                                                                                                       |
| Temperature limiter | Yes                                                                                                                                                                         |
| Finish              | Aluminium                                                                                                                                                                   |
| Norms               | ACS   |



## ADVANTAGES

-  SECURITHERM: Optimum anti-scalding safety
-  Maximum hygiene: no non-return valves
-  Thermostatic: total temperature stability
-  Sequential: opens/closes with cold water

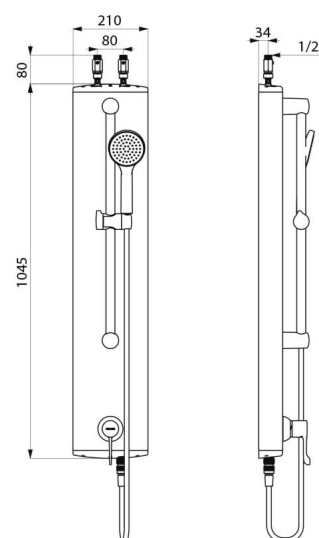

|               |                                                                                   |
|---------------|-----------------------------------------------------------------------------------|
| Warranty      |  |
| Repairability |  |