SECURITHERM shower panel



Ref. H9636

Thermostatic shower panel with mixer with no non-return valves

2026 UK public price excluding VAT: £909.33

DESCRIPTION

SECURITHERM shower panel - Ref. H9636

SECURITHERM shower panel made from anodised aluminium for wall-mounted exposed installation:
SECURITHERM sequential thermostatic shower mixer.
Thermostatic sequential mixer: opens and closes with cold water.
Mixer without non-return valves (reduces bacterial proliferation).
No risk of cross flow between the hot and cold water.
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.
Cold water failsafe prevents cold showers: shuts off automatically if hot water supply fails.
Adjustable temperature control from cold water up to 39°C.
Maximum temperature limiter set at 39°C, can be adjusted.
Thermal shocks are possible.
Flow rate 9 lpm at 3 bar.
Sliding handset on a chrome-plated riser rail with removable flexible hose via rapid push-fit STOP connector.
Hygiene control lever L. 100mm.
Top inlets with M1/2" stopcocks.
Concealed fixings.
Filters.
Shower panel ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
Shower panel with 30-year warranty.


ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- Maximum hygiene: no non-return valves
- Thermostatic: total temperature stability
- Sequential: opens/closes with cold water

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. H9636

Supply	Top inlets with M1/2" inline stopcocks
Connector	M1/2"
Technology	Sequential thermostatic shower mixer
Height	1045mm
Width	210mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Aluminium

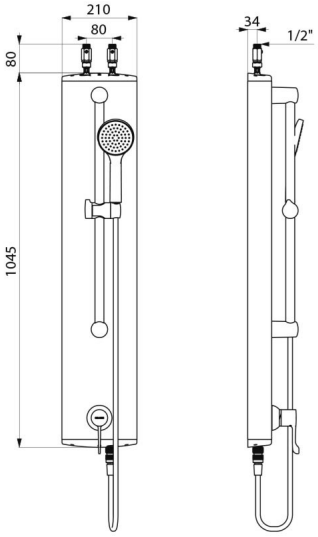

Norms	ACS
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY