

# SECURITHERM shower panel

Ref. H9636

Thermostatic shower panel with mixer with no non-return valves

2026 UK public price excluding VAT: £866.03

## DESCRIPTION

SECURITHERM shower panel - Ref. H9636

SECURITHERM shower panel made from anodised aluminium for wall-mounted exposed installation:  
 SECURITHERM sequential thermostatic shower mixer.  
 Thermostatic sequential mixer: opens and closes with cold water.  
 Mixer without non-return valves (reduces bacterial proliferation).  
 No risk of cross flow between the hot and cold water.  
 Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.  
 Cold water failsafe prevents cold showers: shuts off automatically if hot water supply fails.  
 Adjustable temperature control from cold water up to 39°C.  
 Maximum temperature limiter set at 39°C, can be adjusted.  
 Thermal shocks are possible.  
 Flow rate 9 lpm at 3 bar.  
 Sliding handset on a chrome-plated riser rail with removable flexible hose via rapid push-fit STOP connector.  
 Hygiene control lever L. 100mm.  
 Top inlets with M1/2" stopcocks.  
 Concealed fixings.  
 Filters.  
 Shower panel ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Suitable for people with reduced mobility.  
 Shower panel with 30-year warranty.

## TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. H9636

|                     |                                        |
|---------------------|----------------------------------------|
| Supply              | Top inlets with M1/2" inline stopcocks |
| Connector           | M1/2"                                  |
| Technology          | Sequential thermostatic shower mixer   |
| Height              | 1045mm                                 |
| Width               | 210mm                                  |
| Flow rate           | 9 lpm                                  |
| Temperature limiter | Yes                                    |
| Finish              | Aluminium                              |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Maximum hygiene: no non-return valves



Thermostatic: total temperature stability



Sequential: opens/closes with cold water

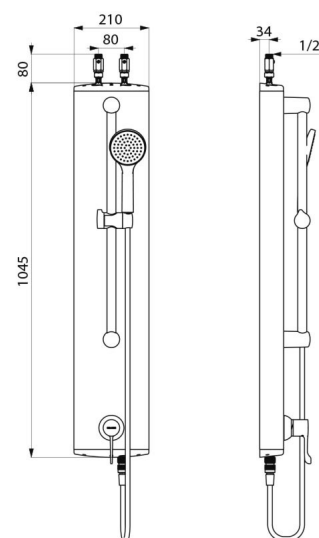

|               |                                                                                                                                                                                                                                                       |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Norms         |    |
| Warranty      |                                                                                                                                                                      |
| Repairability |                                                                                                                                                                      |