

# Shower kit with thermostatic mixer

Ref. H9630SKIT

Shower riser rail with thermostatic mixer with no non-return valve

2024 UK public price excluding VAT: £444.80

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9630SKIT



Shower riser kit with thermostatic sequential mixer,  
Shower riser rail with SECURITHERM thermostatic shower mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
Mixer with no non-return valves on the inlets (reduces bacterial proliferation).  
No risk of cross flow between hot and cold water.  
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant, thermostatic sequential cartridge.  
Temperature control from cold water up to 39°C with maximum temperature limiter set at 39°C.  
Thermal shocks are possible.  
Body with smooth interior and low water volume.  
Flow rate regulated at 9 lpm.  
Chrome plated brass body and Hygiene lever L. 100mm.  
M1/2" bottom shower outlet.  
Wall-mounted mixer with offset standard connectors M1/2" M3/4".  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

- Sliding shower head (ref. 813) on a chrome plated riser rail (ref. 821) with soap dish and flexible hose (ref. 836T1).
- Shower hose retaining collar (ref. 830).

Suitable for people with reduced mobility.  
30-year warranty.





## TECHNICAL CHARACTERISTICS


Shower kit with thermostatic mixer - Ref. H9630SKIT

Connector	M1/2"
Technology	SECURITHERM single control thermostatic mixer, Securitouch
Depth	175mm
Length	184mm
Flow rate	9 lpm
Temperature limiter	39°C
Finish	Chrome-plated brass
Norms	ACS 
Warranty	



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Thermostatic: complete temperature stability

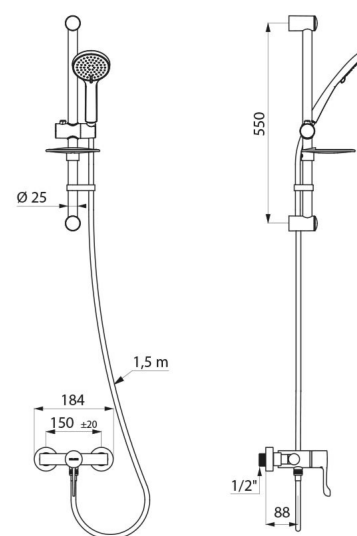

Repairability

