

# SECURITHERM shower panel

Ref. 792414

Electronic battery-operated thermostatic

2024 UK public price excluding VAT: £1,306.93



## DESCRIPTION

**SECURITHERM shower panel - Ref. 792414**

SECURITHERM electronic thermostatic shower panel:  
 Large stainless steel panel for wall-mounted, exposed installation.  
 Concealed inlet via flexibles M $\frac{1}{2}$ ".  
 SECURITHERM thermostatic mixer.  
 Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.  
 Anti-scalding failsafe: automatic shut-off if cold water fails.  
 Anti-cold showers function: automatic shut-off if hot water fails.  
 Thermal shocks are possible.  
 Battery-operated with 223 6V Lithium battery.  
 Shower starts when hand is 4cm from the infrared sensor.  
 Shuts off on demand or automatically after ~60 seconds.  
 Duty flush (~60 seconds every 24 hours after the last use).  
 Flow rate 6 lpm at 3 bar.  
 Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.  
 With integrated soap dish.  
 Concealed fixings.  
 Filters and non-return valves.  
 M $\frac{1}{2}$ " stopcocks.  
 Suitable for people with reduced mobility.  
 30-year warranty.


## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel - Ref. 792414**

|                     |   |
|---------------------|---|
| Supply              | 6V battery  |
| Connector           | M $\frac{1}{2}$ "   |
| Technology          | Electronic  |
| Height              | 1220mm  |
| Depth               | 100mm   |
| Width               | 250mm   |
| Flow rate           | 6 lpm   |
| Temperature limiter | Thermostatic  |
| Finish              | Stainless steel   |
| Norms               | ACS   |

## ADVANTAGES

-  Total hygiene: operate without manual contact
-  Automatic anti-bacterial duty flush
-  Thermostatic temperature regulation
-  Instant shut-off if cold water fails

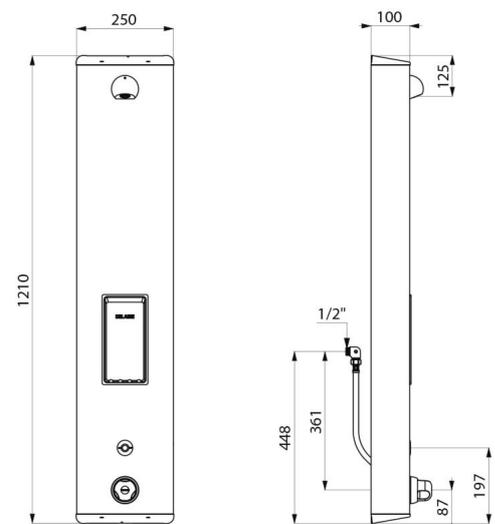

---

Warranty

