

SECURITHERM shower panel

Ref. 792504

Electronic mains supply thermostatic

2026 UK public price excluding VAT: £1,420.06



DESCRIPTION

SECURITHERM shower panel - Ref. 792504

Electronic thermostatic shower panel:

Large stainless steel panel for wall-mounted, exposed installation.

Top inlet via in-line stopcocks $\frac{1}{2}$ ".

SECURITHERM thermostatic mixer.

Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.

Anti-scalding failsafe: automatic shut-off if cold water fails.

Anti-cold showers function: automatic shut-off if hot water fails.

Thermal shocks are possible.

Mains supply 230/6V.

Shower starts when electronic push-button is pressed.

Shuts off voluntarily or automatically after ~60 seconds.

Duty flush (~60 seconds every 24 hours after the last use).

Flow rate 6 lpm at 3 bar, can be adjusted, rain-effect spray.

Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.

Integrated soap dish.

Concealed fixings.

Filters and non-return valves.

Suitable for people with reduced mobility.

30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. 792504

| | |
|---------------------|---------------------|
| Supply | 230/6V mains supply |
| Connector | $\frac{1}{2}$ " |
| Technology | Electronic |
| Height | 1220mm |
| Depth | 100mm |
| Width | 250mm |
| Flow rate | 6 lpm |
| Temperature limiter | Thermostatic |
| Finish | Stainless steel |

ADVANTAGES



Exceptional water savings: 80%




Anti-bacterial proliferation duty flush



Thermostatic temperature regulation



Instant shut-off if cold water fails

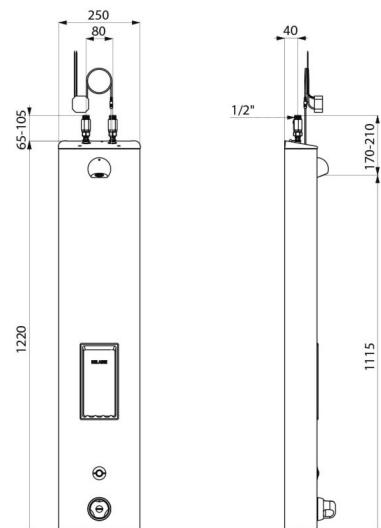

Warranty

