

SECURITHERM shower panel

Ref. 792514

Electronic mains supply thermostatic

2025 UK public price excluding VAT: £1,378.71

DESCRIPTION

SECURITHERM shower panel - Ref. 792514

Electronic thermostatic shower panel:
Large stainless steel panel for wall-mounted, exposed installation.
Concealed inlet via flexibles M $\frac{1}{2}$ ".
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Mains supply 230/6V.
Shower starts when electronic push-button is pressed.
Shuts off voluntarily or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate 6 lpm at 3 bar, can be adjusted, rain-effect spray.
Chrome-plated, tamperproof ROUND shower head.
Integrated soap dish.
Filters and non-return valves.
Stopcocks M $\frac{1}{2}$ ".
Concealed fixings.
Suitable for people with reduced mobility.
30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. 792514

Supply	230/6V mains supply
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	ACS  



ADVANTAGES



Exceptional water savings: 80%




Anti-bacterial proliferation duty flush



Thermostatic temperature regulation



Instant shut-off if cold water fails

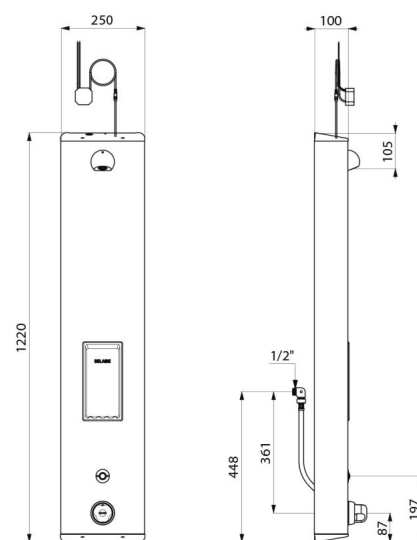

Warranty

