

Shower kit with thermostatic mixer

Ref. H9769SKIT

Shower kit with thermostatic mixer with no non-return valves

2024 UK public price excluding VAT: £451.89

DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9769SKIT

Shower riser rail with dual control thermostatic shower mixer.
Shower kit with SECURITHERM thermostatic shower mixer.
Thermostatic mixer with no non-return valves on the inlets (reduced bacterial proliferation).
No risk of cross flow between hot and cold water.
Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.
Prevents cold showers: shuts off automatically if hot water supply fails.
Securitouch thermal insulation prevents burns.
Scale-resistant thermostatic cartridge for temperature adjustment.
¼-turn ceramic head for flow rate adjustment.
Temperature control up to 43°C.
Double temperature limiter: 1st limiter set at 41°C can be overridden, 2nd limiter set at 43°C.
Thermal shocks are possible without removing the control knob or shutting off the cold water supply.
Flow rate limited to 9 lpm at 3 bar.
Chrome-plated brass body with ergonomic controls.
M½" shower outlet.
F¾" inlets with integrated filters.
Mixer supplied with offset standard wall connectors M½" M¾".
• Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible hose (ref. 836T1).
• Shower head retaining collar (ref. 830).
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Shower kit with 30-year warranty.

TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9769SKIT

| | |
|---------------------|--|
| Connector | M1/2" |
| Technology | SECURITHERM Securitouch thermostatic mixer, no non-return valves |
| Depth | 84mm |
| Length | 260mm |
| Flow rate | 9 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |



ADVANTAGES



SECURITHERM: Anti-scalding safety




Maximum hygiene: no non-return valves



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

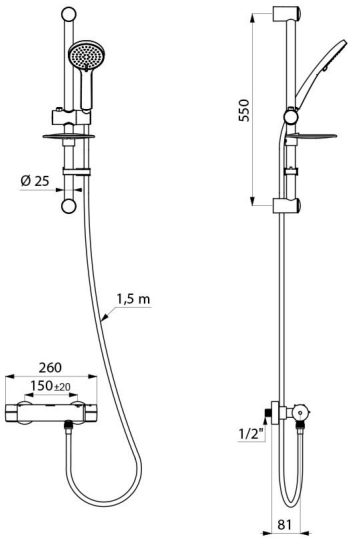

| | |
|----------|---|
| Norms | ACS  |
| Warranty |  |