

SECURITHERM BIOCLIP

thermostatic sink mixer

Ref. H9614P

Wall-mounted sequential thermostatic mixer

2026 UK public price excluding VAT: £628.89



DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9614P

Wall-mounted SECURITHERM thermostatic sink mixer.
Thermostatic sequential mixer: opens and closes with cold water.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Wall-mounted mixer supplied with 2 removable chrome-plated brass spouts L. 126mm.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Scale-resistant sequential thermostatic cartridge for sequential control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
Tested without water to meet NHS requirements. No preset temperature.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
Chrome-plated brass body.
No manual contact thanks to Hygiene control lever L. 146mm.
Mixer with 200mm centres, supplied with 2 in-line STOP/CHECK M1/2" M3/4" connectors ideal for hospitals.
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
Mixer with 30-year warranty.


TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9614P

Connector	M1/2"
Technology	SECURITHERM BIOCLIP sequential mixer
Height	141mm
Width	234mm
Spout length	126mm
Flow rate	7 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  Removable spout: reduces bacterial development
-  SECURITHERM: optimum anti-scalding safety

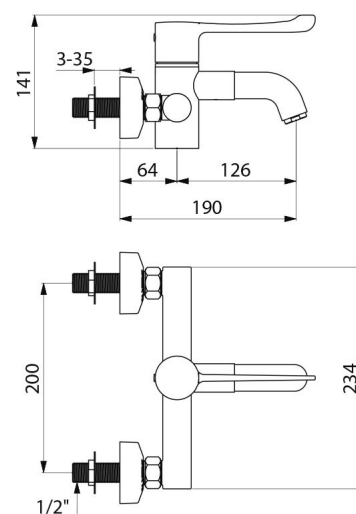

Norms



Warranty



Repairability

