# SECURITHERM BIOCLIP thermostatic sink mixer

Ref. H9614P

Wall-mounted sequential thermostatic mixer

**2026 UK public price excluding VAT: £628.89**



## DESCRIPTION

**SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9614P**

Wall-mounted SECURITHERM thermostatic sink mixer.
Thermostatic sequential mixer: opens and closes with cold water.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Wall-mounted mixer supplied with 2 stainless steel spouts L. 136mm.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Scale-resistant sequential thermostatic cartridge for sequential control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
Tested without water to meet NHS requirements. No preset temperature.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
Chrome-plated brass body.
No manual contact thanks to Hygiene control lever L. 146mm.
Mixer with 200mm centres, supplied with 2 in-line STOP/CHECK M1/2" M3/4" connectors ideal for hospitals.
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
Mixer with 30-year warranty.


## ADVANTAGES

- Sequential: opens/closes with cold water
- Maximum hygiene: no non-return valves
- Removable spout: reduces bacterial development
- SECURITHERM: optimum anti-scalding safety

## TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9614P**

| | |
|---|---|
| Connector | M1/2" |
| Technology | SECURITHERM BIOCLIP sequential mixer |
| Height | 141mm |
| Width | 234mm |
| Spout length | 126mm |
| Flow rate | 7 lpm |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |
| Norms | WRAS |

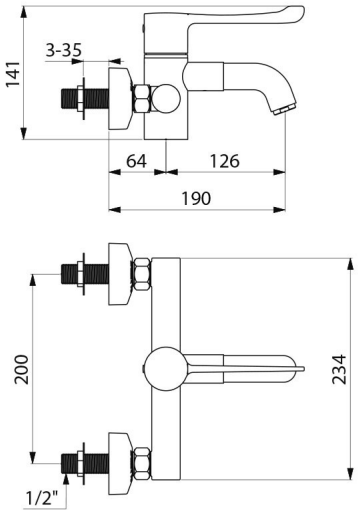

| | |
|---|---|
| Warranty |  |
| Repairability |  |